



ULTRAVIOLET AIR PURIFIERS

PATENTED TECHNOLOGY  
SCIENTIFICALLY PROVEN  
CONTROLS POLLUTANTS  
EASY INSTALLATION  
COST EFFECTIVE

MOLD • BACTERIA • VIRUSES • SMOKE • ODDORS


# Sanuvox CoilClean B30X UV Air Purifier / CoilCleaner



Disconnect power and remove the 3 Rear Panels.

Line up purifier so that the attachment holes on the purifier frame line up with the holes on the rail of the Bard.

Use sheet metal screws to attach the purifier to the Bard unit at the attachment holes and to hold the center brace.

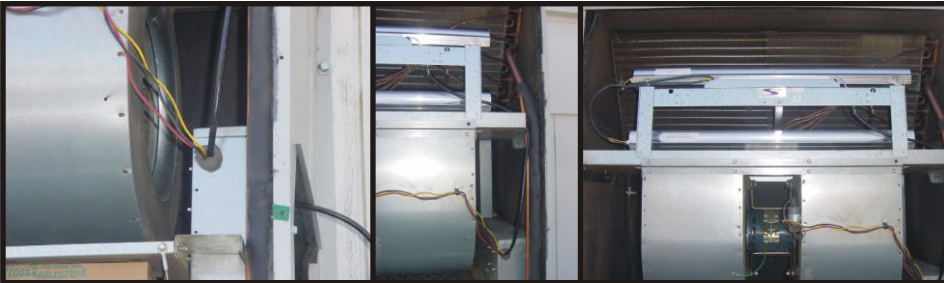

Route the cable into the electrical box on the side of the Bard Unit.

Wrap the foam insulation above the rail with aluminum foil to protect the foam.



The electrical connections are made to the Blower assembly as follows:

Connect a jumper wire with a spade terminal attached to the 220 Volt terminal Cable from UV Purifier.

220 Volt connection from Butt Connector.

Connect the Green ground wire of the cable to the ground lug terminal on the Bard Unit.

Install a spade terminal on the Black wire and connect.


Connect the white wire to the white wire of the cable using a butt connector.



Cover the plastic drain hose with aluminum foil. Make sure that the drain functions properly. Replace Rear covers on the Bard unit.

Apply power.

When the Bard blower starts, you will see the glow from the front of the Coil.

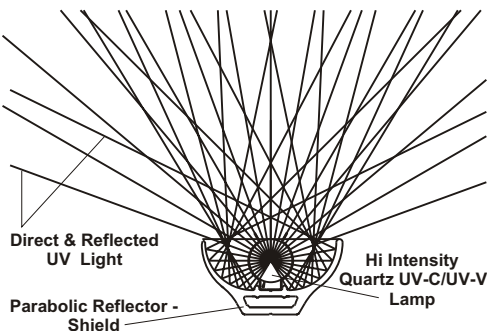

*The Parabolic Reflector - Shield intensifies & Directs UV Energy the same way a car's headlight or flashlight reflector intensifies light, while shielding eyes and plastics from UV exposure.*

